
AQP Hose Assemblies

Racing Hose, Teflon* System Schematics

Racing Hose, Teflon* System Schematics

Typical Brake System Connection Schematic

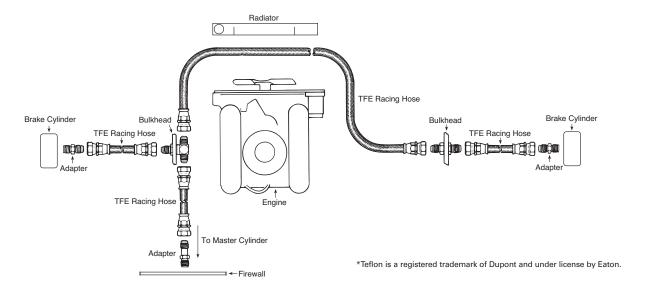

IMPORTANT

Hose Assembly Inspection

Hose assemblies in service should be inspected frequently for leakage, kinking, corrosion, abrasion or any other signs of wear or damage. Hose assemblies that are worn or damaged should be removed from service and replaced immediately.

A Caution about Fuel Injection

All hose listed in the AQP Performance Products catalog are suitable for use with leaded and unleaded fuels. However, caution must be used in fuel injection systems that recirculate fuel. This causes fuel to oxidize which can attack the hose inner tube. To increase service life, keep the time of exposure to the oxidized fuel to a minimum. Drain hose line or flush with original fuel or other suitable material.

For information about Torque Specification and the proper tightness to allow for a good seal, but prevents damage to the fitting by over torque, see technical data sheet:

Torque Specifications for Aluminum Fittings

For information about determining correct hose sizes for flow capacities at suggested flow velocities, see chart:

Flow Capacities of Hose Assemblies at Suggested Flow Velocities



Compliments of Aeroquip Performance Product team. For for more technical information please visit Aeroquipperformance.com

For more information on these and other AQP Performance Products see the catalog Aeroquip Performance Products by Eaton A-SPPE-CC001-E

Warranty For warranty information, please visit www.eaton.com/hydraulics/warranty www.eaton.com